

A New Channel Coding Approach for Random Access with Bursty Traffic

Jie Luo, Anthony Ephremides

Abstract

This paper extends Information Theoretic analysis to packet random access systems with bursty traffic. A new channel coding approach for coding within each data packet is proposed with built-in support for bursty traffic phenomena, such as message underflow, and for random access mechanism, such as packet collision detection. The coding approach does not require joint communication rate determination either between the transmitters or between the transmitters and the receiver. Its performance limitation is characterized by an achievable region defined in terms of communication rates, such that reliable packet recovery is supported for all rates within the region and reliable collision detection is supported for all rates outside the region. For random access communication over a discrete-time memoryless channel using a class of random coding schemes, it is shown that the achievable rate region of the introduced coding approach equals the Shannon information rate region without a convex hull operation. Further connections between the achievable rate region and the Shannon information rate region are explained.

Index Terms

bursty traffic, channel coding, multiple access communication, random access, Shannon capacity

I. INTRODUCTION

Classical information theory regards each transmitter in a multiuser communication system as backlogged with an infinite reservoir of traffic [1][2]. To achieve reliable communication, transmitters first jointly determine their codebooks and information rates and share this information with the receiver and with each other. The encoded symbols are then transmitted to the receiver continuously over a long time duration. Channel capacity and channel coding theorems are proved using the standard argument of jointly typical sequences by taking the sequence (or codeword) length to infinity [1][2].

Jie Luo is with the Electrical and Computer Engineering Department, Colorado State University, Fort Collins, CO 80523. E-mail: rocky@engr.colostate.edu. Anthony Ephremides is with the Electrical and Computer Engineering Department, University of Maryland, College Park, MD 20742. E-mail: etony@umd.edu.

This work was supported by the National Science Foundation under Grants CCF-0728826 and CCF-0728966.

By allowing a small acceptable communication error probability, information theoretic results can be extended to channel coding within a long, but finite-length, time duration [3]. Consequently, in a time-slotted communication model, if information bits arrive stochastically and queue at the transmitters, transmitters can jointly adapt their information rates in each time slot to optimize certain system performance based on coding theoretic results and on the status of the message queues [4][5][6]. Determination of fundamental performance limitations, such as the throughput and queuing delay tradeoff, can therefore be obtained as in [5]. Although such an extension enabled the incorporation of stochastic traffic arrival in information theoretic analysis, it inherited the key assumption, and hence also the limitation, of joint information rate determination among transmitters in each time slot [4][5][6].

For various practical reasons such as bursty traffic arrival, timely data dissemination, and cognitive networking [7], transmitters in a communication network may not always want to or be able to jointly design channel codes and determine their communication rates. Random channel access is therefore commonly seen in practical networks [8]. In random access communication, transmitters make independent channel access decisions, such as whether or not to transmit a packet, without sharing these decisions among each other or with the receiver. If we regard the idling of a transmitter as setting its communication rate at zero and regard the transmission of a packet as setting the communication rate of a transmitter at a non-zero value, then communication rates of the transmitters are determined independently, and the rate information is not shared with the receiver. Independent rate determination leads to unavoidable packet collision [9]. When the joint rates of the transmitters are chosen such that reliable packet recovery is not possible, for efficient functioning of the upper layer protocols, the receiver is required to report a packet collision rather than blindly forwarding unreliable messages to the upper layers [9].

Due to the challenges of relaxing the joint rate determination assumption among transmitters and the receiver, and making collision report decisions at the receiver without knowing the communication rates, information theoretic analysis has not been fully and successfully extended to practical random access systems. Consequently, without the support of rigorous coding theorems, standard networking practice often focuses on throughput optimization using packet-based channel models [10]. The explicit connection of the packet-based channel models to the physical layer channel is usually not specified except through the limited means of packet erasure channels. Networking practice allows bursty traffic arrivals and does not require joint communication rate determination among transmitters. However, the use of abstracted packet-based communication model and the lack of rigorous coding theoretic analysis essentially prevent an insightful understanding about the impact of physical layer communication to upper layer networking [8].

In this paper, we propose an approach that holds promise in extending information theoretic analysis

to packet random access systems with bursty traffic. The essence of our approach consists of using the classical foundation of coding for each packet and explicitly building-in the support of random access operations and bursty traffic phenomena in the following sense. In our coding approach, each transmitter determines its communication rate by choosing the number of data bits to encode in each packet. It requires neither joint communication rate determination among transmitters, nor pre-sharing communication rate information with the receiver. It also enables collision detection at the receiver whenever reliable packet recovery is not possible. Although defined quite differently from classical channel coding, we find that the introduced coding approach does lead to a meaningful achievable rate region characterization that is consistent with current understanding and methodology of Information Theory. More specifically, we define an achievable region on the communication rates such that reliable packet recovery is supported for all communication rates within the region and reliable packet collision detection is supported for all communication rates outside the region¹. For random multiple access communication over a discrete-time memoryless channel using a class of random coding schemes, we show that the achievable rate region of the introduced coding approach equals the Shannon information rate region without a convex hull operation. Although we only illustrate our results in single-user and simple multiple access systems, the general problem formulation shown in the paper can be extended to other random access scenarios².

Next, we start with a detailed explanation of the coding approach in a single user system (i.e., single transmitter-receiver pair) in Section II. We then extend it to a random multiple access system and prove the main coding theorem in Section III. Further extensions are discussed in Section IV.

II. A NEW PACKET CODING APPROACH – THE SINGLE USER CASE

Let us first consider a single user communication system over a discrete-time memoryless channel. The channel is modeled by a conditional distribution function $P_{Y|X}$ where $X \in \mathcal{X}$ is the channel input symbol and $Y \in \mathcal{Y}$ is the channel output symbol and, $\mathcal{X}$, $\mathcal{Y}$ are the finite input and output alphabets. We assume that time is slotted with each slot equaling N symbol durations, which is also the length of a packet. Unless otherwise specified, we will confine our focus on block channel codes of length N that represent coding within each packet. Throughout this section, we assume communication channel is time-invariant. The channel is known at the receiver but *unknown* at the transmitter. Our main objective is to use a relatively simple system model to introduce the basic coding approach that provides multiple rate options to the transmitter and enables collision detection at the receiver. Proofs of the claims and

¹Note that communication rates are chosen arbitrarily and the rate information is unknown at the receiver.

²We want to emphasize that our work does not purpose to fully bridge the gap between Networking and Information Theory. However, it does provide a useful link between rigorous communication rate determination and practical random access networking.

theorems given in this section are skipped since they are trivially implied by the more general theorems given in Section III.

A. Random Coding with Multiple Rate Options

Consider the simple case when the transmitter uses a classical random coding scheme, originally introduced in [11]. The coding scheme is described as follows. Let $\mathcal{L} = \{\mathcal{C}_\theta : \theta \in \Theta\}$ be a library of codebooks, indexed by a set Θ . Each codebook contains 2^{NR_0} codewords of length N , where R_0 is a predetermined rate parameter. Denote $[\mathcal{C}_\theta(w)]_j$ as the j th symbol of the codeword corresponding to message w in codebook $\mathcal{C}_\theta$. Assume at the beginning of a time slot, the transmitter randomly generates codebook index θ according to a distribution γ . The distribution γ and the codebooks $\mathcal{C}_\theta$ are chosen such that random variables $X_{w,j} : \theta \rightarrow [\mathcal{C}_\theta(w)]_j, \forall j, w$ are i.i.d. according to a predetermined input distribution P_X . We assume the receiver knows the code library and the value of θ , that is, the receiver knows the randomly generated codebook. This can be achieved by sharing a random codebook generation algorithm with the transmitter. Based upon this information and the channel output, the receiver gives an estimate $\hat{w}$ of the transmitted message w . Define $P_e(w) = \Pr\{\hat{w} \neq w\}$ as the decoding error probability given that w is the transmitted message. By following the analysis in [11], it is easily seen that, if $R_0 < I(X; Y)$, there exists a sequence of decoding algorithms to achieve $\lim_{N \rightarrow \infty} P_e(w) = 0$ for all w . The asymptotic result here should be interpreted as: given two small positive constants ϵ_1, ϵ_2 , there exists a threshold $N(\epsilon_1, \epsilon_2)$, such that $N > N(\epsilon_1, \epsilon_2)$ and $R_0 < I(X; Y) - \epsilon_2$ imply $P_e(w) < \epsilon_1$ for all w [12]. Although understanding of the tradeoff between $N, \epsilon_1, \epsilon_2$ is important, it is outside the scope of this paper. We will not repeat this well-known observation in the rest of the paper.

Now recall the standard practice of packet networking with bursty traffic [9]. Depending on message availability, in each time slot, the transmitter will either stay idle or transmit a packet according to data availability and the MAC layer protocol. Suppose the same coding scheme is used in multiple time slots, which means that, when channel code is designed, the transmitter does not know whether or not a message will be available in a particular time slot. To model the idle operation, we regard “idle” as a specific channel input symbol and insert a particular codeword $\mathcal{C}_\theta(1) = \{\text{idle}, \dots, \text{idle}\}$ into every codebook in the library $\mathcal{L}$. When no input data is available, we say $w = 1$ and the transmitter sends $\mathcal{C}_\theta(1)$ through the channel. It can be shown that, if $R_0 < I(X; Y)$, we can still achieve $\lim_{N \rightarrow \infty} P_e(w) = 0$ for all w .

Based on the above coding scheme, we will now introduce a communication rate parameter r . According to the usual practice, when the transmitter idles, we say the communication rate is $r = 0$, otherwise, the communication rate is $r = R_0$. We say the codebook has two classes of codewords. The first class contains one codeword $\mathcal{C}_\theta(1)$ corresponding to $r = 0$. The second class contains 2^{NR_0} codewords corresponding to

$r = R_0$. The coding scheme enables the transmitter to choose its communication rate $r \in \{0, R_0\}$ without sharing the rate information with the receiver. If $R_0 < I(X; Y)$, reliable recovery of the (w, r) pair can be achieved asymptotically.

Next, let us consider a more complicated situation. Assume each codebook in the library contains three classes of codewords. As before, the first two codeword classes contain one and 2^{NR_0} codewords, respectively. The third class contains 2^{NR_1} codewords corresponding to $r = R_1$. We assume the index distribution γ and the codebooks are designed such that random variables $X_{w,j} : \theta \rightarrow [\mathcal{C}_\theta(w)]_j, \forall j, w$ are independently distributed. Codeword symbols in the second class are i.i.d. according to an input distribution $P_{X|R_0}$, while codeword symbols in the third class are i.i.d. according to an input distribution $P_{X|R_1}$. Note that the two input distributions may be different. Let $I_{R_0}(X; Y)$ and $I_{R_1}(X; Y)$ be the mutual information between channel input and output symbols computed using input distributions $P_{X|R_0}$ and $P_{X|R_1}$, respectively. Assume $R_0 < I_{R_0}(X; Y)$, while $R_1 > I_{R_1}(X; Y)$. In this case, the coding scheme provides three rate options $r \in \{0, R_0, R_1\}$ at the transmitter. However, it is clear that reliable message recovery is not always possible. Nevertheless, rather than trying to recover the messages blindly, let us assume the receiver *intend* to achieve a different set of objectives. For all messages corresponding to $r = 0$ and $r = R_0$, the receiver *intends* to recover the messages. For all messages corresponding to $r = R_1$, the receiver *intends* to report a packet “collision”³. Note that the receiver needs to achieve these objectives without knowing the actual communication rate r . To be more specific, let (w, r) be the transmitted message and rate pair. The receiver either outputs an estimated pair $(\hat{w}, \hat{r})$, or outputs a “collision”. For (w, r) with $r \in \{0, R_0\}$, we define $P_e(w, r) = \Pr\{(\hat{w}, \hat{r}) \neq (w, r)\}$ as the decoding error probability. For (w, r) with $r = R_1$, we define $P_c(w, r) = \Pr\{\text{collision}\}$ as the collision detection probability. It can be shown that, there exists a sequence of decoding algorithms to asymptotically achieve $\lim_{N \rightarrow \infty} P_e(w, r) = 0$ for all (w, r) with $r \in \{0, R_0\}$, and $\lim_{N \rightarrow \infty} P_c(w, r) = 1$ for all (w, r) with $r = R_1$.

In the above coding scheme, the transmitter has multiple rate options. The encoding scheme can be designed with only channel alphabet information. If the receiver knows the communication channel, whenever the transmitter sends a message with rate $r < I_r(X; Y)$, the receiver can asymptotically recover the message with an error probability arbitrarily close to zero; whenever the transmitter sends a message with rate $r > I_r(X; Y)$, the receiver can asymptotically report a collision with a probability arbitrarily close to one.

³Note that the term “collision” is used to maintain consistency with the networking terminology. Throughout the paper, “collision” means packet erasure, irrespective whether it is caused by multi-packet interference or not.

B. Generalized Random Coding Scheme and The Standard Rate

In the previous section, we defined communication rate as the number of data bits per symbol encoded in a packet. The transmitter uses a random coding scheme whose codewords are categorized according to different rate options. In each category, codeword symbols are generated to be i.i.d. Asymptotic behavior of the system is also categorized according to the communication rates. However, if we view the coding scheme from a different angle, we will see that the communication rate parameter r is actually a subtle concept. Since the transmitter essentially uses a codebook to map a message and rate pair (w, r) into a codeword, one can index all possible values of (w, r) , and regard the index W as a macro message. Consequently, the communication rate $r = r(W)$ becomes an arbitrarily defined function of W , or in other words, r is determined by an arbitrary partitioning of the codebook. Properties of the achievable rates are dependent on the particular form of the $r(W)$ function. For example, if all codeword symbols in the random coding scheme are generated according to the same input distribution, different rate definitions (or codewords partitioning) lead to different rate achievability results even though they all correspond to the same codeword generation algorithm. To avoid such ambiguity, we introduce a *standard* rate function $r(W)$ as follows.

Definition 1: (standard communication rate) Assume codebook $\mathcal{C}$ has $2^{NR_{\max}}$ codewords of length N , where $R_{\max}$ is an arbitrary large finite constant. Let the corresponding messages or codewords be indexed by $W \in \{1, \dots, 2^{NR_{\max}}\}$. For each message W , we define its *standard communication rate*, in bits per symbol, as $r(W) = \frac{1}{N} \log_2 W$. ■

Unlike the practical communication rate definition used in Section II-A, the standard rate function $r(W) = \frac{1}{N} \log_2 W$ is invertible. Consequently, achievable rates of any other rate function can be derived from achievable rates of the standard rate function.

Next, we introduce a generalized random coding scheme, in which, symbols of different codewords, as opposed to different codeword classes, can be generated according to different input distributions.

Definition 2: (generalized random coding) Let $\mathcal{L} = \{\mathcal{C}_\theta : \theta \in \Theta\}$ be a library of codebooks. Each codebook in the library contains $2^{NR_{\max}}$ codewords of length N , where $R_{\max}$ is an arbitrary large finite constant. Let the codebooks be indexed by a set Θ . Let the actual codebook chosen by the transmitter be $\mathcal{C}_\theta$ where the index θ is a random variable following distribution γ . We define $(\mathcal{L}, \gamma)$ as a *generalized random coding scheme* following distribution $P_{X|W}$, given that the following two conditions are satisfied. First, the random variables $X_{W,j} : \theta \rightarrow [\mathcal{C}_\theta(W)]_j, \forall j, W$, are independent. Second, given W , $X_{W,j}$ should be i.i.d. according to input distribution $P_{X|W}$. ■

We now define a sequence of generalized random coding schemes that follows an asymptotic input distribution.

Definition 3: Let $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ be a sequence of random coding schemes, where $(\mathcal{L}^{(N)}, \gamma^{(N)})$ is a generalized random coding scheme with codeword length N and input distribution $P_{X|W^{(N)}}^{(N)}$. Assume each codebook in library $\mathcal{L}^{(N)}$ has $2^{NR_{\max}}$ codewords. Let $P_{X|r}$ be an input distribution defined as a function of the standard rate r , for all $r \in [0, R_{\max}]$. We say $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ follows an asymptotic input distribution $P_{X|r}$, if for all $\{W^{(N)}\}$ sequences⁴ with well defined rate limit $\lim_{N \rightarrow \infty} r(W^{(N)})$, we have

$$\lim_{N \rightarrow \infty} P_{X|W^{(N)}}^{(N)} = \lim_{N \rightarrow \infty} P_{X|r(W^{(N)})}. \quad (1)$$

Note that since we do not assume $P_{X|r}$ is continuous in r , we may not have $\lim_{N \rightarrow \infty} P_{X|r(W^{(N)})} = P_{X|\lim_{N \rightarrow \infty} r(W^{(N)})}$. ■

C. Achievable Rate Region of Single-user Random Access Communication

Consider single-user random access communication using a generalized random coding scheme $(\mathcal{L}, \gamma)$ with codeword length N . In each time slot, the transmitter randomly generates codebook index θ and uses codebook $\mathcal{C}_\theta$ in the library to map a message W into a codeword. Assume receiver knows the channel and the codebook $\mathcal{C}_\theta$, based on this information and the received channel symbols, the receiver either outputs a message estimate $\hat{W}$ or reports a collision. Let $P_{e|\theta}(\mathcal{C}_\theta, W) = \Pr\{\hat{W} \neq W\}$ be the probability, conditioned on θ , that the receiver is not able to recover message W . Let $P_{c|\theta}(\mathcal{C}_\theta, W) = \Pr\{\text{collision}\}$ be the conditional probability that the receiver reports a collision. We define $P_e(W)$ and $P_c(W)$ as the unconditional error probability and the unconditional collision probability of message W , respectively, as follows

$$P_e(W) = E_\theta[P_{e|\theta}(\mathcal{C}_\theta, W)], \quad P_c(W) = E_\theta[P_{c|\theta}(\mathcal{C}_\theta, W)]. \quad (2)$$

With the error probability definition, we define an achievable rate region of the system as follows.

Definition 4: Consider single user random access communication using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$, where $(\mathcal{L}^{(N)}, \gamma^{(N)})$ is a generalized random coding scheme corresponding to codeword length N . Let $R \subseteq [0, R_{\max}]$ be a region of standard rates. Let R_c be the closure of R . We say R is *asymptotically achievable* if there exists a sequence of decoding algorithms under which the following two conditions are satisfied. First, for all message sequences $\{W^{(N)}\}$ with $r(W^{(N)}) \in R$ for all N and $\lim_{N \rightarrow \infty} r(W^{(N)}) \in R$, where $r(W^{(N)}) = \frac{1}{N} \log_2 W^{(N)}$ is the standard rate function, we have $\lim_{N \rightarrow \infty} P_e(W^{(N)}) = 0$. Second, for all message sequences $\{W^{(N)}\}$ with $r(W^{(N)}) \notin R_c$ for all N and $\lim_{N \rightarrow \infty} r(W^{(N)}) \notin R_c$, we have $\lim_{N \rightarrow \infty} P_c(W^{(N)}) = 1$. ■

We are now ready to formally present the coding theorem for a single-user random access system.

⁴Here $\{W^{(N)}\}$ refers to an arbitrary *deterministic*, i.e., not random, message sequence. Each message $W^{(N)}$ in the sequence takes value in the index set $\{1, \dots, 2^{NR_{\max}}\}$. The standard rate function $r(W^{(N)})$ is defined as $r(W^{(N)}) = \frac{1}{N} \log_2 W^{(N)}$.

Theorem 1: Consider single user random access communication over a discrete time memoryless channel $P_{Y|X}$. Assume the transmitter is equipped with a sequence of generalized random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ following an asymptotic input distribution $P_{X|r}$. Assume $P_{X|r}$ is continuous in r except at finite number of points. The following standard communication rate region R is asymptotically achievable,

$$R = \{r | \text{either } r = 0 \text{ or } r < I_r(X; Y)\}, \quad (3)$$

where mutual information $I_r(X; Y)$ is computed using input distribution $P_{X|r}$.

Furthermore, for any sequence of random coding schemes following asymptotic input distribution $P_{X|r}$, assume $\tilde{R}$ is an asymptotically achievable rate region. Let $\tilde{r}$ be an arbitrary rate inside $\tilde{R}$ in the sense that we can find $\delta > 0$ with $r \in \tilde{R}$ for all $\tilde{r} \leq r \leq \tilde{r} + \delta$. If the asymptotic conditional input distribution $P_{X|r}$ is continuous in r at $\tilde{r}$, then we must have

$$\tilde{r} \leq I_{\tilde{r}}(X; Y). \quad (4)$$

■

Theorem 1 is implied by Theorem 2 given in Section III.

It is important to note that the achievable rate region characterized in Theorem 1 is significantly different from a Shannon information rate region [1]. For reliable communication in the classical Shannon sense, information rate equals the normalized log of the codebook size. The rate must be predetermined since both the transmitter and the receiver need to know the codebook before message transmission is started. Collision or erasure detection is therefore not needed if the receiver knows the channel [2]. In our coding approach for random access communication, the codebook contains a large number of codewords. With a new definition of the communication rate, either in the practical sense as used in Section II-A or in the standard rate sense as introduced in Section II-B, the coding scheme provides multiple rate options to the transmitter. If the transmitter does not know the channel and chooses its communication rate arbitrarily, it becomes the receiver's responsibility to *detect* whether the communication rate is outside the achievable rate region or not. This is a fundamental functionality required in random access communication but not seen in classical Information Theoretic communication.

By regarding collision report at the receiver as message erasure, the new coding approach shares certain similarity with error and erasure decoding [13] in a classical communication system. However, there is also a fundamental difference. In classical communication, if the codebook is optimized with information rate below the channel capacity, then both the error and the erasure probabilities diminish asymptotically for *all* codewords in the codebook. In our coding approach, however, the normalized log of the codebook size can be way above the channel capacity. In this case, codewords are essentially partitioned into two classes according to their associated communication rate values. For codewords whose rates are

inside the achievable rate region, the probability of successful decoding goes to one asymptotically. For codewords whose rates are outside the region, however, the probability of message erasure goes to one asymptotically. Such codeword categorization and codeword-dependent asymptotic decoding behavior are not seen in classical communication systems.

Note that, in Theorem 1, the asymptotic input distribution $P_{X|r}$ could be discontinuous in r . For random access communication, the inclusion of a possible discontinuous input distribution $P_{X|r}$ is necessary. Consider the last example coding scheme given in Section II-A. Each codebook in the library is partitioned into three codeword classes. The codeword classes contain $1, 2^{NR_0}, 2^{NR_1}$ codewords, respectively. We have explained that, practically, these codeword classes correspond to the options of encoding $0, NR_0$, and NR_1 data bits into a packet. Suppose the communication channel is Gaussian. For the three encoding options, a common choice of the transmitter could be setting the input distributions at Gaussian distributions corresponding to three different transmission powers, $P = 0, P = P_0$, and $P = P_1$. Let us denote the three Gaussian input distributions by $\mathcal{N}(0, 0), \mathcal{N}(0, P_0), \mathcal{N}(0, P_1)$. If we characterize the asymptotic input distribution as a function of the *standard communication rate*, we get the following $P_{X|r}$.

$$P_{X|r} = \begin{cases} \mathcal{N}(0, 0) & r = 0 \\ \mathcal{N}(0, P_0) & 0 < r \leq R_0 \\ \mathcal{N}(0, P_1) & R_0 < r \leq R_1 \end{cases} \quad (5)$$

In this example, $P_{X|r}$ is discontinuous in r at $r = 0$ and $r = R_0$.

III. A NEW PACKET CODING APPROACH – RANDOM MULTIPLE ACCESS COMMUNICATION

In this section, we extend the coding theorem to a K -user, symbol synchronous, random multiple access system over a discrete-time memoryless channel. The channel is modeled by a conditional distribution function $P_{Y|X_1, \dots, X_K}$, where $X_i \in \mathcal{X}_i$ is the channel input symbol of user i with $\mathcal{X}_i$ being the input alphabet, and $Y \in \mathcal{Y}$ is the channel output symbol with $\mathcal{Y}$ being the output alphabet. To simplify the discussion, we assume $\mathcal{Y}$ and $\mathcal{X}_i$, for all i , are finite. Extending the results to continuous channels is straightforward. As in Section II, we assume time is slotted with each slot being equal to N symbol durations, which is also the length of a packet.

We assume each user, say user i , is equipped with a generalized random coding scheme $(\mathcal{L}_i, \gamma_i)$. Each codebook in the library contains $2^{NR_{\max}}$ codewords of length N , where $R_{\max}$ is an arbitrary large constant whose particular value is not important. At the beginning of each time slot, user i randomly generates a codebook index θ_i , and uses the corresponding codebook in its library to encode a macro message W_i into a codeword. Note that a macro message contains communication rate information, as already explained in Section II-B. We assume the channel is known both at the transmitters and at the receiver. The receiver

also knows the particular codebook chosen by each user, and this can be achieved by sharing the random codebook generation algorithms with the receiver. However, we assume communication rates of the users are shared neither among each other nor with the receiver.

We use bold-font characters to denote vectors whose i th elements are the corresponding variables of user i . For example, $\mathcal{L}$ represents the vector of code libraries of the users. Also, θ denotes the random index vector, $\mathcal{C}_\theta$ denotes the codebook vector, $\mathbf{W}$ denotes the message vector, $\mathbf{r}(\mathbf{W})$ denotes the standard rate vector, and $\mathbf{P}_{\mathbf{X}|r}$ denotes the asymptotic input distributions of the random coding schemes, etc.

A. Collision Detection for All Users

Let $\mathbf{W}$ be the transmitted message vector, encoded using codebook $\mathcal{C}_\theta$. Assume, upon observing the received channel symbols, the receiver either outputs message estimate $\hat{\mathbf{W}}$ for all users, or reports a collision. We define $P_{e|\theta}(\mathcal{C}_\theta, \mathbf{W}) = \Pr\{\hat{\mathbf{W}} \neq \mathbf{W}\}$ as the probability, conditioned on θ , that the receiver is not able to recover the message vector $\mathbf{W}$. Define $P_{c|\theta}(\mathcal{C}_\theta, \mathbf{W}) = \Pr\{\text{collision}\}$ as the conditional probability that the receiver reports a collision. Assume random coding schemes $(\mathcal{L}, \gamma)$. Let θ be drawn independently according to γ . We define $P_e(\mathbf{W})$ and $P_c(\mathbf{W})$ as the unconditional error probability and the unconditional collision probability of message $\mathbf{W}$, respectively.

$$P_e(\mathbf{W}) = E_\theta[P_{e|\theta}(\mathcal{C}_\theta, \mathbf{W})], \quad P_c(\mathbf{W}) = E_\theta[P_{c|\theta}(\mathcal{C}_\theta, \mathbf{W})]. \quad (6)$$

Definition 5: Consider random multiple access communication using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$, where $(\mathcal{L}^{(N)}, \gamma^{(N)})$ is a vector of generalized random coding schemes with each codebook in $\mathcal{L}^{(N)}$ containing $2^{NR_{\max}}$ codewords of length N . Let $\mathbf{R}$ be a region of standard rate vectors. Let $\mathbf{R}_c$ be the closure of $\mathbf{R}$. We say $\mathbf{R}$ is asymptotically achievable if there exists a sequence of decoding algorithms under which the following two conditions are satisfied. First, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}$ for all N and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}$, we have $\lim_{N \rightarrow \infty} P_e(\mathbf{W}^{(N)}) = 0$. Second, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_c$ for all N and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_c$, we have $\lim_{N \rightarrow \infty} P_c(\mathbf{W}^{(N)}) = 1$. ■

The following theorem characterizes the asymptotically achievable rate region of a random multiple access system.

Theorem 2: Consider random multiple access communication over a discrete-time memoryless channel $P_{Y|X_1, \dots, X_K}$ using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$. Assume $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ follows asymptotic distribution $\mathbf{P}_{\mathbf{X}|r}$. Assume that, for any user i , $P_{X_i|r_i}$ is only discontinuous in r_i at a finite number of points. The following standard communication rate region $\mathbf{R}$ is asymptotically achievable.

$$\mathbf{R} = \left\{ \mathbf{r} \left| \forall S \subseteq \{1, \dots, K\}, \text{ either } r_{i \in S} = 0, \text{ or } \sum_{i \in S} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) \right. \right\}, \quad (7)$$

where mutual information $I_r(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S})$ is computed using input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$.

Furthermore, for any sequence of random coding schemes following the asymptotic conditional input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$, assume $\tilde{\mathbf{R}}$ is an asymptotically achievable rate region. Let $\tilde{\mathbf{r}}$ be an arbitrary rate vector inside $\tilde{\mathbf{R}}$ in the sense that we can find $\delta > 0$ with $\mathbf{r} \in \tilde{\mathbf{R}}$ for all $\tilde{\mathbf{r}} \leq \mathbf{r} \leq \tilde{\mathbf{r}} + \delta \mathbf{1}$, where $\mathbf{1}$ is a vector of all ones. Let $S \subseteq \{1, \dots, K\}$ be an arbitrary user subset. If the asymptotic conditional input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$ is continuous in $\mathbf{r}_{i \in S}$ at $\tilde{\mathbf{r}}$, then we must have

$$\sum_{i \in S} \tilde{r}_i \leq I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}). \quad (8)$$

■

The achievability part of Theorem 2 is implied by Theorem 3 which is provided later in this section. The proof of Theorem 3 is given in Appendix B and the converse part of Theorem 2 is proved in Appendix A.

When the asymptotic conditional input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$ is not a function of $\mathbf{r}$, i.e. codewords of each user are generated according to the same input distribution, the achievable rate region $\mathbf{R}$ given in (7) becomes

$$\mathbf{R} = \left\{ \mathbf{r} \mid \forall S \subseteq \{1, \dots, K\}, \sum_{i \in S} r_i < I(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) \right\}. \quad (9)$$

This is identical to the Shannon information rate region without a convex hull operation for the multiple access channel under a given input distribution [2].

Note that in a classical channel coding scheme, users jointly determine their information rates by choosing codebooks with appropriate numbers of codewords. To decode the messages, the receiver essentially needs to search all codewords (e.g. maximum likelihood decoding or typical sequence decoding) throughout the codebook [2]. Random access communication does not assume joint rate determination among users [10]. Therefore the users cannot know a priori if their rate vector is within the achievable rate region or not. In this sense, the situation is similar to the single-user case discussed in Section II. In our coding approach, codebooks of the users contain large numbers of codewords. However, the codewords are indexed by their standard rate parameters and the receiver only searches for appropriate codewords within the achievable rate region, which can be regarded as a subset of joint codewords in the codebooks. The receiver reports a collision if an appropriate codeword cannot be found.

B. Collision Detection for Each Individual User

In Section III-A, we assumed that the receiver should either output reliable message estimates for *all* users, or report a collision. When multiple users compete for the channel, it is often the case that the receiver may only be interested in recovering messages from a subset of users. Correspondingly, a collision

should only be reported when messages from the users of interest are not decodable. Let us first assume the receiver only wants to recover the message from a particular user, say user k . Given that message $\mathbf{W}$ is transmitted over the multiple access channel using codebook $\mathcal{C}_\theta$. The receiver either outputs a message estimate $\hat{W}_k$ for user k , or reports a collision.

Before we proceed further, it is important to note that, even though the receiver is only interested in decoding the message of user k , whether reliable message recovery is possible for user k still can depend on the *transmitted* messages of *all* users. Therefore, when we define the error probabilities and the achievable rate region, the rates of *all* users are still involved.

Define $P_{ek|\theta}(\mathcal{C}_\theta, \mathbf{W}) = Pr\{\hat{W}_k \neq W_k\}$ as the probability, conditioned on θ that the receiver is not able to recover user k 's message W_k . Define $P_{ck|\theta}(\mathcal{C}_\theta, \mathbf{W}) = Pr\{\text{collision}\}$ as the conditional probability that the receiver reports a collision for user k . We define $P_{ek}(\mathbf{W}) = E_\theta[P_{ek|\theta}(\mathcal{C}_\theta, \mathbf{W})]$ and $P_{ck}(\mathbf{W}) = E_\theta[P_{ck|\theta}(\mathcal{C}_\theta, \mathbf{W})]$ as the error probability and the collision probability of message $\mathbf{W}$ for user k .

Definition 6: Consider random multiple access communication using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$, where $(\mathcal{L}^{(N)}, \gamma^{(N)})$ is a generalized random coding scheme with each codebook in $\mathcal{L}^{(N)}$ containing $2^{NR_{\max}}$ codewords of length N . Let $\mathbf{R}_k$ be a region of standard rate vectors. Let $\mathbf{R}_{kc}$ be the closure of $\mathbf{R}_k$. We say $\mathbf{R}_k$ is asymptotically achievable for user k if there exists a sequence of decoding algorithms under which the following two conditions are satisfied. First, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}_k$ for all N and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}_k$, we have $\lim_{N \rightarrow \infty} P_{ek}(\mathbf{W}^{(N)}) = 0$. Second, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_{kc}$ for all N and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_{kc}$, we have $\lim_{N \rightarrow \infty} P_{ck}(\mathbf{W}^{(N)}) = 1$. ■

The following theorem gives an achievable rate region for user k .

Theorem 3: Consider random multiple access communication over a discrete-time memoryless multiple access channel $P_{Y|X_1, \dots, X_K}$ using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$. Assume $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ follows asymptotic input distributions $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$. Assume that, for any user i , $P_{X_i|r_i}$ is only discontinuous in r_i at a finite number of points. The following standard rate region $\mathbf{R}_k$ is asymptotically achievable for user k .

$$\mathbf{R}_k = \left\{ \mathbf{r} \left| \begin{array}{l} \forall S \subseteq \{1, \dots, K\}, k \in S, \text{ either } r_k = 0, \\ \text{or } \exists \tilde{S} \subseteq S, k \in \tilde{S}, \text{ such that, } \sum_{i \in \tilde{S}} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) \end{array} \right. \right\}, \quad (10)$$

where mutual information $I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}})$ is computed using input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$. ■

The proof of Theorem 3 is given in Appendix B.

Theorem 3 can be easily extended to the case when the receiver is interested in recovering messages from a subset of users, as shown in the next theorem.

Theorem 4: Consider random multiple access communication over a discrete-time memoryless multiple access channel $P_{Y|X_1, \dots, X_K}$ using a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$. Assume

$\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ follows asymptotic input distributions $P_{X|r}$. Assume that, for any user i , $P_{X_i|r_i}$ is only discontinuous in r_i at a finite number of points. Let $S_0 \subseteq \{1, \dots, K\}$ be a user subset. The following rate region $\mathbf{R}_{S_0}$ is asymptotically achievable for users $k \in S_0$.

$$\mathbf{R}_{S_0} = \left\{ \mathbf{r} \left| \begin{array}{l} \forall S \subseteq \{1, \dots, K\}, S \cap S_0 \neq \emptyset, \exists \tilde{S}, S \cap S_0 \subseteq \tilde{S} \subseteq S, \\ \text{such that, either } r_{i \in \tilde{S}} = 0, \text{ or } \sum_{i \in \tilde{S}} r_i < I_r(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin S}) \end{array} \right. \right\}, \quad (11)$$

where mutual information $I_r(\mathbf{X}_{j \in \tilde{S}}; Y | \mathbf{X}_{k \notin S})$ is computed using input distribution $P_{X|r}$. ■

The proof of Theorem 4 is given in Appendix D.

Note that when $S_0 = \{1, \dots, K\}$, $\mathbf{R}_{S_0}$ given in (11) is equal to the rate region $\mathbf{R}$ given in (9).

IV. SIMPLE EXAMPLES

In this section, we illustrate the asymptotically achievable rate region results in two simple example random multiple access systems.

Example 1: Consider a K user random multiple access system over a memoryless Gaussian channel modeled by

$$Y = \sum_{i=1}^K X_i + V. \quad (12)$$

where V is a white Gaussian noise with zero mean and variance N_0 .

Assume that the input distribution of user k , for all k , is Gaussian with zero mean and variance P_k , irrespective of the rate parameter. Assume the receiver wants to recover messages of all users. According to Theorem 1, the following rate region is asymptotically achievable

$$\mathbf{R} = \left\{ \mathbf{r} \left| \forall S \subseteq \{1, \dots, K\}, \sum_{i \in S} r_i < \frac{1}{2} \log \left(1 + \frac{\sum_{i \in S} P_i}{N_0} \right) \right. \right\}. \quad (13)$$

Note that the achievable rate region $\mathbf{R}$ is identical to the Shannon channel capacity region [2].

If for all k , the input distribution is Gaussian with zero mean and variance P_k for any non-zero rate, and user k idles at rate zero, then the achievable rate region is still given by (13).

Example 2: Consider a K user random multiple access system over a memoryless symbol collision channel. We define an n th order symbol collision channel as follows. The channel input alphabet of any user is given by $\mathcal{X} = \{0, 1, \dots, 2^n\}$, where 0 represents an idle symbol. The channel output alphabet is given by $\mathcal{Y} = \{0, 1, \dots, 2^n, c\}$, where c represents a collision symbol. If all users idle, the receiver receives an idle symbol, $Y = 0$; if only one user, say user k , transmits a non-zero symbol X_k , the receiver receives $Y = X_k$; if multiple users transmit non-zero symbols, the receiver receives $Y = c$, i.e., a collision symbol. We assume in all input distributions the non-zero symbols always take equal probabilities. Consequently, an input distribution $P_{X_k|r_k}$ can be characterized through a single parameter $p(r_k)$, which is the probability that any particular symbol in the transmitted codeword takes a non-zero value.

Proposition 1: Assume the conditional input distribution of user k , for all k , is given by

$$P_{X_k|r_k} = \begin{cases} 1 - \sqrt{r_k/n} & \text{for } X_k = 0 \\ \frac{1}{2^n} \sqrt{r_k/n} & \text{for } X_k = j \in \{1, \dots, 2^n\} \end{cases}. \quad (14)$$

In other words, $p(r_k) = \sqrt{r_k/n}$. Assume that the receiver wants to recover the messages of all users. The following rate region $\mathbf{R}$ is asymptotically achievable.

$$\mathbf{R} = \left\{ \mathbf{r} \mid \sum_{i=1}^K \sqrt{r_i/n} < 1 \right\}. \quad (15)$$

■

Proposition 1 is proven in Appendix E.

Note that when $K = 2$, the rate region $\mathbf{R}$ given in (15) equals the random multiple access throughput and stability regions of the collision channel [14], which also approaches the asynchronous information capacity region of the collision channel as $n \rightarrow \infty$ [15]. Proposition 1 therefore motivates the question whether there is a fundamental connection between the achievable rate region studied in this paper and the throughput, stability, information capacity regions of the random multiple access channel discussed in [10]. Obtaining a theoretical answer to this question is an important issue for future research.

In both examples, the achievable rate region $\mathbf{R}$ is coordinate convex in the sense that if $\hat{\mathbf{r}} \in \mathbf{R}$ then $\mathbf{r} \in \mathbf{R}$ for all $\mathbf{r} \leq \hat{\mathbf{r}}$. However, in general, depending on the choice of the asymptotic input distribution, the region may not be continuous in the sense that not every point pair in the region is connected by a continuous path in the region. In this case, the region is certainly not coordinate convex.

V. FURTHER DISCUSSIONS

Throughout our analysis, we obtained asymptotic results by taking the packet length to infinity. It is unfortunately the nature of random access systems that their packets are often reasonably short. Therefore, it is necessary to investigate the achievable rate and error performance under the assumption of a finite packet length. This is similar to the channel dispersion analysis presented in [12] for classical communication systems. Alternatively, one can also characterize the achievable rate and error performance tradeoff in a way similarly to the error exponent analysis for classical channel coding [3]. An example of such derivation can be found in [16].

We have assumed that the multiple access channel is fully known at the receiver. Even though users do not pre-share their rate information, their codebooks are assumed known at the receiver. To extend our results to other random access scenarios, one has to carefully examine whether these assumptions are still valid or reasonable. If not, deriving coding performance under various channel and codebook information availability assumptions becomes the key challenge.

The coding approach studied in this paper enabled a network user to choose its communication rate by encoding a variable number of data bits into a packet. How should a user determine its communication rate in a particular time slot, however, is a challenging MAC layer problem. Nevertheless, comparing to the packet-based channel model used in classical MAC layer performance analysis [10], performance limitations of the introduced coding approach provided a useful bridge to support the joint optimization of MAC layer networking and physical layer channel coding.

VI. CONCLUSION

We proposed a new channel coding approach for coding within each packet in a random access system with bursty traffic. The coding approach enabled each user to choose its communication rate without pre-sharing the rate information with the receiver and other users. Performance of the coding approach is characterized by an achievable region defined on the communication rates. The receiver is required to output reliable message estimates if the communication rates are inside the achievable rate region; the receiver should report a collision if the rates are outside the region. We showed that the maximum achievable rate region of random coding schemes takes a form similar to the Shannon information rate region without a convex hull operation. The achievable rate region when the receiver is interested in recovering messages only from a subset of users is also obtained.

There are numerous questions left open that would further tighten the connection between random access networking and Information Theory. We believe that our approach contributes an important component to that connection by distinguishing the issues of reliable communication and reliable collision detection in a rigorous manner.

APPENDIX

A. Proof of Theorem 2

Proof: Note that the achievability part of Theorem 2 is implied by Theorem 3. Here we prove the converse part of Theorem 2.

Let $\tilde{\mathbf{R}}$ be an asymptotically achievable rate region. Let $\tilde{\mathbf{r}} \in \tilde{\mathbf{R}}$ be a rate vector inside $\tilde{\mathbf{R}}$. We can find a $\delta > 0$ such that $\mathbf{r} \in \tilde{\mathbf{R}}$ for all $\tilde{\mathbf{r}} \leq \mathbf{r} \leq \tilde{\mathbf{r}} + \delta \mathbf{1}$. Let $S \subseteq \{1, \dots, K\}$ be a given user subset.

Because the asymptotic distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$, and hence the entropy functions, are continuous in $\mathbf{r}_{i \in S}$ at $\tilde{\mathbf{r}}$, we can find a small enough $\delta > 0$ and a bound $u_\delta > 0$ with $\lim_{\delta \rightarrow 0} u_\delta = 0$, such that for all rates $\mathbf{r}$, with $\mathbf{r}_{i \notin S} = \tilde{\mathbf{r}}_{i \notin S}$ and $\tilde{\mathbf{r}}_{i \in S} \leq \mathbf{r}_{i \in S} < \tilde{\mathbf{r}}_{i \in S} + \delta \mathbf{1}_{i \in S}$, we have

$$|I_{\mathbf{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) - I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S})| \leq u_\delta, \quad (16)$$

where mutual information $I_r(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S})$ is evaluated using input distribution $P_{\mathbf{X}|r}$ and mutual information $I_{\tilde{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S})$ is evaluated using input distribution $P_{\mathbf{X}|\tilde{r}}$.

Let $\mathbf{W}^{(N)}$ be the actual source message. We assume $\mathbf{W}^{(N)}$ is generated randomly according to a uniform distribution under the condition that $\mathbf{r}_{i \notin S}(\mathbf{W}^{(N)}) = \tilde{\mathbf{r}}_{i \notin S}$ and $\tilde{\mathbf{r}}_{i \in S} \leq \mathbf{r}_{i \in S}(\mathbf{W}^{(N)}) < \tilde{\mathbf{r}}_{i \in S} + \delta \mathbf{1}_{i \in S}$. Assume codewords $\mathbf{X}_{i \notin S}^{(N)}$ are known to the receiver. Let $\hat{\mathbf{W}}^{(N)}$ be the message estimated by the receiver. Define $P_e^{(N)} = Pr\{\hat{\mathbf{W}}^{(N)} \neq \mathbf{W}^{(N)}\}$ as the error probability. Note that

$$\lim_{N \rightarrow \infty} \frac{1}{N} H(\mathbf{W}_{i \in S}^{(N)}) = \lim_{N \rightarrow \infty} \frac{1}{N} \sum_{i \in S} \log_2 (2^{\tilde{r}_i + \delta} - 2^{\tilde{r}_i}) = \sum_{i \in S} (\tilde{r}_i + \delta). \quad (17)$$

We assume N is large enough such that $H(\mathbf{W}_{i \in S}^{(N)}) \geq N \sum_{i \in S} \tilde{r}_i$. According to Fano's inequality [17], we have

$$\begin{aligned} \sum_{i \in S} \tilde{r}_i &\leq \frac{1}{N} H(\mathbf{W}_{i \in S}^{(N)}) = \frac{1}{N} H(\mathbf{W}_{i \in S}^{(N)} | \mathbf{W}_{i \notin S}^{(N)}, \hat{\mathbf{W}}_{i \in S}^{(N)}) + \frac{1}{N} I(\mathbf{W}_{i \in S}^{(N)}; \hat{\mathbf{W}}_{i \in S}^{(N)} | \mathbf{W}_{i \notin S}^{(N)}) \\ &< \frac{1}{N} + \frac{1}{N} P_e^{(N)} H(\mathbf{W}_{i \in S}^{(N)}) + \frac{1}{N} I(\mathbf{W}_{i \in S}^{(N)}; \hat{\mathbf{W}}_{i \in S}^{(N)} | \mathbf{W}_{i \notin S}^{(N)}). \end{aligned} \quad (18)$$

For large enough N , (18) implies

$$\begin{aligned} \sum_{i \in S} \tilde{r}_i &\leq \frac{1}{N} I(\mathbf{W}_{i \in S}^{(N)}; \hat{\mathbf{W}}_{i \in S}^{(N)} | \mathbf{W}_{i \notin S}^{(N)}) + u_\delta \\ &\leq \frac{1}{N} I_{\mathbf{r}(\mathbf{W}^{(N)})}(\mathbf{X}_{i \in S}^{(N)}; Y^{(N)} | \mathbf{X}_{i \notin S}^{(N)}) + u_\delta \\ &\leq \frac{1}{N} H_{\mathbf{r}(\mathbf{W}^{(N)})}(Y^{(N)} | \mathbf{X}_{i \notin S}^{(N)}) - \frac{1}{N} H_{\mathbf{r}(\mathbf{W}^{(N)})}(Y^{(N)} | \mathbf{X}^{(N)}) + u_\delta \\ &\leq H_{\mathbf{r}(\mathbf{W}^{(N)})}(Y | \mathbf{X}_{i \notin S}) - H_{\mathbf{r}(\mathbf{W}^{(N)})}(Y | \mathbf{X}) + u_\delta \\ &\leq I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) + 2u_\delta. \end{aligned} \quad (19)$$

Taking $\delta \rightarrow 0$ in (19) yields (8). ■

B. Proof of Theorem 3

Proof: Although the basic idea of the proof follows from Shannon's typical sequence arguments introduced in the channel capacity proof [1], it is significantly complicated by the following two factors. First, the receiver is only interested in recovering a particular user's message rather than messages of all users. Second, the empirical input distribution of different codewords may be different. Due to these complications, and for easy understanding, we choose to present the full proof in five detailed steps.

Step 1 (The typical sequence decoder): We first define a typical sequence decoder as follows. Consider a sequence of random coding schemes $\{(\mathcal{L}^{(N)}, \gamma^{(N)})\}$ following asymptotic input distribution $P_{\mathbf{X}|r}$. For any given codeword length N , let $\mathbf{X}^{(N)}$ be the randomly chosen codeword associated to message $\mathbf{W}^{(N)}$. Let $\mathbf{Y}^{(N)}$ be the channel output sequence. Define $\mathbf{r}(\mathbf{X}^{(N)}) = \mathbf{r}(\mathbf{W}^{(N)}) = \frac{1}{N} \log_2(\mathbf{W}^{(N)})$

as the standard rate vector corresponding to $\mathbf{W}^{(N)}$ and $\mathbf{X}^{(N)}$. To simplify the proof, we assume the input distribution of random coding scheme $(\mathcal{L}^{(N)}, \gamma^{(N)})$, denoted by $\mathbf{P}_{\mathbf{X}|\mathbf{W}^{(N)}}$, is indeed equal to the asymptotic input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}(\mathbf{W}^{(N)})}$, for all N . Extending the proof to the general case is straightforward.

We define the set $A_\epsilon^{(N)}(\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}})$ of jointly typical sequences $\{(\mathbf{X}^{(N)}, Y^{(N)})\}$ with respect to the distribution $\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}} = \mathbf{P}_{Y|\mathbf{X}}\mathbf{P}_{\mathbf{X}|\mathbf{r}}$ as the set of length N sequences with empirical entropies ϵ -close to the true entropies.

$$\begin{aligned} A_\epsilon^{(N)}(\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}}) = & \left\{ (\mathbf{X}^{(N)}, Y^{(N)}) \in \mathcal{X}^N \times \mathcal{Y}^N \mid \right. \\ & \forall S \subseteq \{1, \dots, K\}, \\ & \left| -\frac{1}{N} \log_2 \Pr\{\mathbf{X}_{j \in S}^{(N)}\} - H(\mathbf{X}_{j \in S}) \right| < \epsilon, \\ & \left| -\frac{1}{N} \log_2 \Pr\{Y^{(N)}\} - H(Y) \right| < \epsilon, \\ & \left. \left| -\frac{1}{N} \log_2 \Pr\{\mathbf{X}_{j \in S}^{(N)}, Y^{(N)}\} - H(\mathbf{X}_{j \in S}, Y) \right| < \epsilon \right\}, \end{aligned} \quad (20)$$

where the entropies are computed using input distribution $\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}}$.

Assume after observing the channel output sequence $Y^{(N)}$, the receiver obtains a set $X_\epsilon^{(N)}$ of codewords that are jointly typical with $Y^{(N)}$.

$$X_\epsilon^{(N)} = \left\{ \mathbf{X}^{(N)} \mid (\mathbf{X}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)}(\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}}), \mathbf{r}(\mathbf{X}^{(N)}) \in \mathbf{R}_k \right\}. \quad (21)$$

The receiver outputs message estimate $W_k^{(N)}$ for user k if, for all codewords $\mathbf{X}^{(N)} \in X_\epsilon^{(N)}$, the k th codeword $X_k^{(N)}$ of $\mathbf{X}^{(N)} \in X_\epsilon^{(N)}$ corresponds to the same message $W_k^{(N)}$. If such $W_k^{(N)}$ doesn't exist, the receiver outputs a collision for user k .

Step 2 (Some key definitions): Let $\sigma > 0$ be a small constant. We define $\mathbf{R}_k^{(\sigma)}$ as a subset of $\mathbf{R}_k$.

$$\mathbf{R}_k^{(\sigma)} = \left\{ \hat{\mathbf{r}} \mid \begin{array}{l} \forall S \subseteq \{1, \dots, K\}, k \in S, \exists \tilde{S} \subseteq S, k \in \tilde{S}, \\ \text{such that, } \sum_{i \in \tilde{S}} \hat{r}_i < I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - \sigma \end{array} \right\}. \quad (22)$$

Let M be a large integer whose value will be specified soon. We define $\left\{0, \frac{R_{\max}}{M}, \frac{2R_{\max}}{M}, \dots, R_{\max}\right\}$ as the set of *grid rates* of a user. Define $r_g(W^{(N)}) = \left\lfloor \frac{Mr(W^{(N)})}{R_{\max}} \right\rfloor \frac{R_{\max}}{M}$ as a function that outputs the largest grid rate less than or equal to $r(W^{(N)})$. Let $\mathbf{r}_g(\mathbf{W}^{(N)})$ be the corresponding vector function of $r_g(W^{(N)})$.

Let $\{\mathbf{W}^{(N)}\}$ be an arbitrary message sequence satisfying $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) = \hat{\mathbf{r}}$, for some $\hat{\mathbf{r}}$. Assume $\mathbf{W}^{(N)}$ is the transmitted message with codeword length N . Let the actual codeword associated to $\mathbf{W}^{(N)}$ be $\mathbf{X}^{(N)}$, which is a random variable depending on the codebook index θ . Let the channel output sequence be $Y^{(N)}$. It is easy to show

$$\lim_{N \rightarrow \infty} \Pr \left\{ (\mathbf{X}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}(\mathbf{X}^{(N)})} \right) \right\} = 1. \quad (23)$$

That is, with an asymptotic probability of one, the receiver will find $Y^{(N)}$ be jointly typical with the transmitted codeword vector $\mathbf{X}^{(N)}$.

Step 3 (Error type I, outputting the wrong message): In this step, we will show the probability that the receiver can find another codeword vector $\tilde{\mathbf{W}}^{(N)}$ in the achievable rate region, i.e., $\mathbf{r}(\tilde{\mathbf{W}}^{(N)}) \in \mathbf{R}_k$, with $\tilde{W}_k^{(N)} \neq W_k^{(N)}$, is asymptotically zero.

Without loss of generality, we focus our discussion on an arbitrary subset of messages in the achievable rate region. The subset is denoted by $\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$, illustrated in Figure 1, with the notation being explained as follows. Superscript N denotes the codeword length. Subscript S is a subset of users $S \subseteq \{1, \dots, K\}$ with $k \in S$. We assume for all messages $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ in the subset, we have $\tilde{\mathbf{W}}_{i \notin S}^{(N)} = \mathbf{W}_{i \notin S}^{(N)}$, and $\tilde{W}_i^{(N)} \neq W_i^{(N)}, \forall i \in S$. In other words, for all users not in S , their messages should equal to the corresponding transmitted messages, and for any user in S , its message should not equal to the transmitted message. Subscript $\hat{\mathbf{r}}$ is a vector characterizing the rates of messages in the subset. For all messages $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$, we have $\mathbf{r}(\tilde{\mathbf{W}}_{i \notin S}^{(N)}) = \hat{\mathbf{r}}_{i \notin S}$, and $\mathbf{r}_g(\tilde{\mathbf{W}}_{i \in S}^{(N)}) = \hat{\mathbf{r}}_{i \in S}$. In other words, entries of $\hat{\mathbf{r}}_{i \in S}$ take grid rate values, with $\hat{\mathbf{r}}_{i \in S} \leq \mathbf{r}(\tilde{\mathbf{W}}_{i \in S}^{(N)}) < \hat{\mathbf{r}}_{i \in S} + \frac{R_{\max}}{M} \mathbf{1}_{i \in S}$. In summary, the message subset $\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ is defined as follows.

$$\bar{B}_{S,\hat{\mathbf{r}}}^{(N)} = \left\{ \tilde{\mathbf{W}}^{(N)} \left| \begin{array}{l} \tilde{\mathbf{W}}_{i \notin S}^{(N)} = \mathbf{W}_{i \notin S}^{(N)} \\ \tilde{W}_i^{(N)} \neq W_i^{(N)}, \forall i \in S \\ \mathbf{r}_g(\tilde{\mathbf{W}}^{(N)}) = \hat{\mathbf{r}} \end{array} \right. \right\}. \quad (24)$$

Let M be large enough, such that the following inequality is satisfied for all messages $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ and for all user subset $\tilde{S} \subseteq S$, $k \in \tilde{S}$.

$$\left| I_{\mathbf{r}(\tilde{\mathbf{W}}^{(N)})}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) \right| \leq \frac{\sigma}{3}, \quad (25)$$

where σ is the small constant appeared in (22)⁵. We also let M be large enough such that

$$\frac{(K+1)R_{\max}}{M} \leq \frac{\sigma}{6}. \quad (26)$$

Define $P_e^{(N)}\{\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}\}$ as the probability that the receiver can find a message $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ whose codeword $\tilde{\mathbf{X}}^{(N)}$ satisfies $(\tilde{\mathbf{X}}^{(N)}, Y^{(N)}) \in A_e^{(N)}\left(\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{X}}^{(N)})}\right)$. We will show next that $\lim_{N \rightarrow \infty} P_e^{(N)}\{\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}\} = 0$, for all $\hat{\mathbf{r}}$, S , and $\hat{\mathbf{r}}$ that satisfy the assumptions.

Note that $\lim_{N \rightarrow \infty} P_e^{(N)}\{\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}\} = 0$ holds trivially in any of the following two situations. First, $\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ is an empty set for large N . Second, for large N and for all $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$,

⁵Note that, if the asymptotic input distribution $\mathbf{P}_{\mathbf{X} | \mathbf{r}}$ is not continuous in $\mathbf{r}_{i \in S}$ at $\hat{\mathbf{r}}$ for all $\hat{\mathbf{r}}$ satisfying $\tilde{\mathbf{r}}_{i \notin S} = \hat{\mathbf{r}}_{i \notin S}$, $\hat{\mathbf{r}}_{i \in S} \leq \tilde{\mathbf{r}}_{i \in S} < \hat{\mathbf{r}}_{i \in S} + \frac{R_{\max}}{M} \mathbf{1}_{i \in S}$, then (22) may not be satisfied only by setting M at a large value. In this case, one needs to further partition the set $\bar{B}_{S,\hat{\mathbf{r}}}^{(N)}$ into a finite number of subsets, such that (22) is satisfied by messages within each subset. The partitioning is possible because the asymptotic input distribution of every user is discontinuous at most at a finite number of rate points. The rest of the proof can essentially be applied to each subset of messages with only minor revisions. Hence the corresponding discussion is skipped.

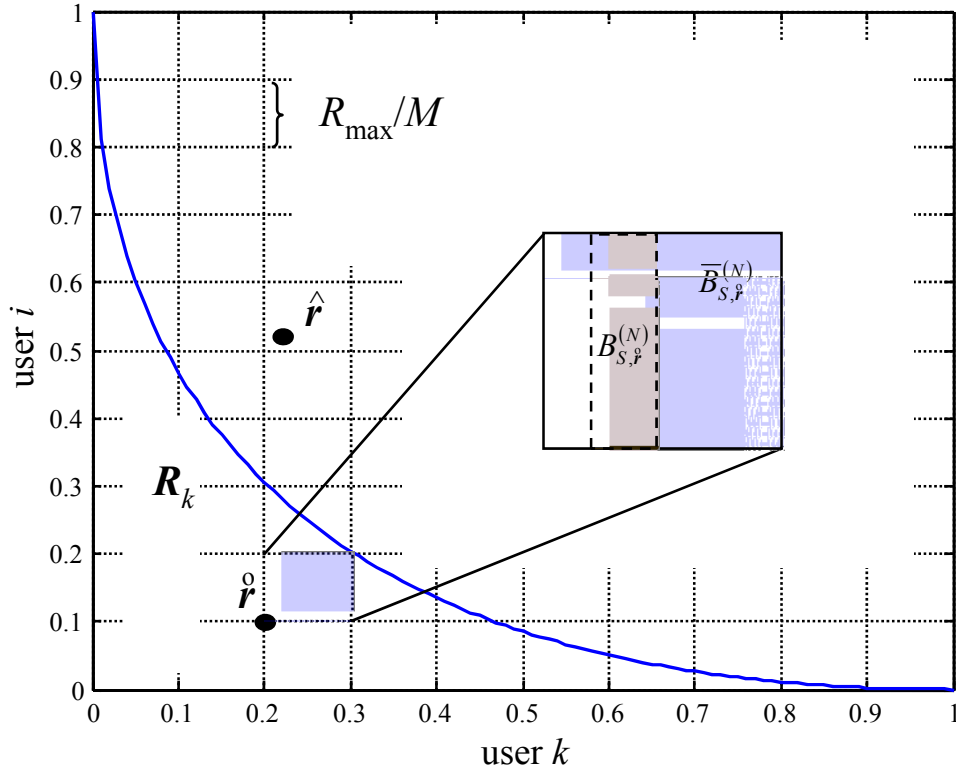


Fig. 1. An illustration of achievable rate region and grid rates.

$\left| -\frac{1}{N} \log_2 Pr\{Y^{(N)} | \mathbf{X}_{i \notin S}^{(N)}\} - H_{\mathbf{r}(\tilde{\mathbf{W}}^{(N)})}(Y | \mathbf{X}_{i \notin S}) \right| > \epsilon$, where $Y^{(N)}$ is the channel output corresponding to the actual message $\mathbf{W}^{(N)}$, $H_{\mathbf{r}(\tilde{\mathbf{W}}^{(N)})}(Y | \mathbf{X}_{i \notin S})$ is the entropy function computed using input distribution $\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{W}}^{(N)})}$. Therefore, in the rest of the proof in Step 3, we assume N is large enough, $\bar{B}_{S, \hat{\mathbf{r}}}^{(N)}$ is not empty, and the following inequality holds.

$$\left| -\frac{1}{N} \log_2 Pr\{Y^{(N)} | \mathbf{X}_{i \notin S}^{(N)}\} - H_{\hat{\mathbf{r}}}(Y | \mathbf{X}_{i \notin S}) \right| \leq \epsilon. \quad (27)$$

Since $\hat{\mathbf{r}} \in \mathbf{R}_k^{(\sigma)}$, we can find a user subset $\tilde{S} \subseteq S$ with $k \in \tilde{S}$, such that

$$\sum_{i \in \tilde{S}} \hat{r}_i < I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - \sigma. \quad (28)$$

Let $\tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S, \hat{\mathbf{r}}}^{(N)}$ be a message whose codeword is denoted by $\tilde{\mathbf{X}}^{(N)}$. Define $\tilde{\mathbf{r}} = \mathbf{r}(\tilde{\mathbf{W}}^{(N)})$. We say $\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}$ is jointly typical with $Y^{(N)}$, denoted by $(\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{X}}^{(N)})} \right)$, if there exists a codeword $\hat{\mathbf{X}}^{(N)}$ with $(\hat{\mathbf{X}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{X}}^{(N)})} \right)$ and $\hat{\mathbf{X}}_{i \in \tilde{S}}^{(N)} = \tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}$. According to the definition of $\bar{B}_{S, \hat{\mathbf{r}}}^{(N)}$, for all $i \in S$, $\tilde{W}_i^{(N)} \neq W_i^{(N)}$. Under this condition, $\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}$ and $Y^{(N)}$ are generated independently. Consequently, the probability that $(\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{X}}^{(N)})} \right)$ can be upper

bounded as follows.

$$\begin{aligned}
& \log_2 \left[Pr \left\{ (\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \hat{\mathbf{r}}} \right) \right\} \right] \\
& \leq N \left[(H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}} | Y | \mathbf{X}_{i \notin \tilde{S}}) + \epsilon) - (H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}} | \mathbf{X}_{i \notin \tilde{S}}) - \epsilon) - (H_{\hat{\mathbf{r}}}(Y | \mathbf{X}_{i \notin \tilde{S}}) - \epsilon) \right] \\
& = -N \left[I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - 3\epsilon \right].
\end{aligned} \tag{29}$$

Combining (29) with (25), we get

$$\begin{aligned}
& \log_2 \left[Pr \left\{ (\tilde{\mathbf{X}}_{i \in \tilde{S}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \hat{\mathbf{r}}} \right) \right\} \right] \\
& \leq -N \left[I_{\mathbf{r}_g(\tilde{\mathbf{W}}^{(N)})}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - \frac{\sigma}{3} - 3\epsilon \right] \\
& = -N \left[I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - \frac{\sigma}{3} - 3\epsilon \right].
\end{aligned} \tag{30}$$

Consequently,

$$P_e^{(N)} \{ \bar{B}_{S, \hat{\mathbf{r}}}^{(N)} \} \leq \sum_{\substack{\tilde{\mathbf{W}}_{i \in \tilde{S}}^{(N)} \\ \tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S, \hat{\mathbf{r}}}^{(N)}}} 2^{-N [I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) - \frac{\sigma}{3} - 3\epsilon]}. \tag{31}$$

Assume N is large enough, so that

$$\sum_{\substack{\tilde{\mathbf{W}}_{i \in \tilde{S}}^{(N)} \\ \tilde{\mathbf{W}}^{(N)} \in \bar{B}_{S, \hat{\mathbf{r}}}^{(N)}}} 1 < 2^{N \sum_{i \in \tilde{S}} (\hat{r}_i + \frac{R_{\max}}{M})} \leq 2^{N (\sum_{i \in \tilde{S}} \hat{r}_i + \frac{K R_{\max}}{M})}. \tag{32}$$

Therefore (31), (32) and (26) yield

$$\log_2 (P_e^{(N)} \{ \bar{B}_{S, \hat{\mathbf{r}}}^{(N)} \}) < N \left[\sum_{i \in \tilde{S}} \hat{r}_i - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) + \frac{\sigma}{2} + 3\epsilon \right]. \tag{33}$$

Because $\sum_{i \in \tilde{S}} \hat{r}_i - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin \tilde{S}}) + \sigma < 0$, choose $\epsilon < \frac{\sigma}{6}$, we get

$$\lim_{N \rightarrow \infty} P_e^{(N)} \{ \bar{B}_{S, \hat{\mathbf{r}}}^{(N)} \} = 0. \tag{34}$$

Note that, given σ , (34) holds for all $\hat{\mathbf{r}}$, S , and $\hat{\mathbf{r}}$ satisfying our assumptions. Therefore, by taking $M \rightarrow \infty$, we can see the probability that the receiver finds a message $\tilde{\mathbf{W}}^{(N)}$ in $\mathbf{R}_k^{(\sigma)}$ with codeword $\tilde{\mathbf{X}}^{(N)}$ being jointly typical with $Y^{(N)}$ and $\tilde{W}_k^{(N)} \neq W_k^{(N)}$ is asymptotically zero. Next, by taking $\sigma \rightarrow 0$, we conclude that, for all message sequences $\{\mathbf{W}^{(N)}\}$, the probability for the receiver to output $\tilde{W}_k^{(N)} \neq W_k^{(N)}$ is asymptotically zero. As a special case, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}_k$, $\forall N$, and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \in \mathbf{R}_k$, we have $\lim_{N \rightarrow \infty} P_{ek}(\mathbf{W}^{(N)}) = 0$.

Step 4 (Error type II, failing to report a collision): In this step, we will show if the standard rate vector $\mathbf{r}(\mathbf{X}^{(N)})$ is outside the achievable rate region, i.e., $\mathbf{r}(\mathbf{X}^{(N)}) \notin \mathbf{R}_{kc}$, then the probability that the receiver does not report a collision is asymptotically zero. Based on the result we have already

demonstrated in Step 3, we only need to show that, asymptotically, the receiver is not able to find another codeword vector $\tilde{\mathbf{X}}^{(N)}$ inside the rate region, $\mathbf{r}(\tilde{\mathbf{X}}^{(N)}) \in \mathbf{R}_k$, with $\tilde{X}_k^{(N)} = X_k^{(N)}$, and $\tilde{\mathbf{X}}^{(N)}$ being jointly typical with $Y^{(N)}$.

We again focus our discussion on a message set denoted by $B_{S,\hat{\mathbf{r}}}^{(N)}$, as illustrated in Figure 1, with the notation being explained below. As before, superscript N denotes the codeword length. Subscript S is a user subset $S \subseteq \{1, \dots, K\}$ with $k \in S$. Also as in Step 3, we assume for all messages $\tilde{\mathbf{W}}^{(N)} \in B_{S,\hat{\mathbf{r}}}^{(N)}$ in the set, $\tilde{\mathbf{W}}_{i \notin S}^{(N)} = \mathbf{W}_{i \notin S}^{(N)}$, and for all $i \in S \setminus \{k\}$, $\tilde{W}_i^{(N)} \neq W_i^{(N)}$. However, differs from Step 3, we assume $\tilde{W}_k^{(N)} = W_k^{(N)}$ ⁶. Subscript $\hat{\mathbf{r}}$ is a vector characterizing the rates of messages in the subset. For all messages $\tilde{\mathbf{W}}^{(N)} \in B_{S,\hat{\mathbf{r}}}^{(N)}$, we have $\mathbf{r}(\tilde{\mathbf{W}}_{i \notin S \setminus \{k\}}^{(N)}) = \hat{\mathbf{r}}_{i \notin S \setminus \{k\}}$, and $\mathbf{r}_g(\tilde{\mathbf{W}}_{i \in S \setminus \{k\}}^{(N)}) = \hat{\mathbf{r}}_{i \in S \setminus \{k\}}$. In other words, entries of $\hat{\mathbf{r}}_{i \in S \setminus \{k\}}$ take grid rate values, with $\hat{\mathbf{r}}_{i \in S \setminus \{k\}} \leq \mathbf{r}(\tilde{\mathbf{W}}_{i \in S \setminus \{k\}}^{(N)}) < \hat{\mathbf{r}}_{i \in S \setminus \{k\}} + \frac{R_{\max}}{M} \mathbf{1}_{i \in S \setminus \{k\}}$. In summary, the message set $B_{S,\hat{\mathbf{r}}}^{(N)}$ is defined as follows.

$$B_{S,\hat{\mathbf{r}}}^{(N)} = \left\{ \tilde{\mathbf{W}}^{(N)} \left| \begin{array}{l} \tilde{\mathbf{W}}_{i \notin S}^{(N)} = \mathbf{W}_{i \notin S}^{(N)} \\ \tilde{W}_k^{(N)} = W_k^{(N)} \\ \tilde{W}_i^{(N)} \neq W_i^{(N)}, \forall i \in S \setminus \{k\} \\ \mathbf{r}_g(\tilde{\mathbf{W}}^{(N)}) = \hat{\mathbf{r}} \end{array} \right. \right\}. \quad (35)$$

Define $\bar{P}_e^{(N)}\{B_{S,\hat{\mathbf{r}}}^{(N)}\}$ as the probability that the receiver can find a message $\tilde{\mathbf{W}}^{(N)} \in B_{S,\hat{\mathbf{r}}}^{(N)}$ whose codeword $\tilde{\mathbf{X}}^{(N)}$ satisfies $(\tilde{\mathbf{X}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)}\left(\mathbf{P}_{(\mathbf{X},Y)|\mathbf{r}(\tilde{\mathbf{X}}^{(N)})}\right)$. We will show next that, for all $\hat{\mathbf{r}} \notin \mathbf{R}_{kc}$, S , and $\hat{\mathbf{r}}$, $\lim_{N \rightarrow \infty} \bar{P}_e^{(N)}\{B_{S,\hat{\mathbf{r}}}^{(N)}\} = 0$.

We let M be large enough, such that the following inequality is satisfied for all messages $\tilde{\mathbf{W}}^{(N)} \in B_{S,\hat{\mathbf{r}}}^{(N)}$ and for all user subsets $\tilde{S} \subseteq S$, $k \in \tilde{S}$ ⁷.

$$\left| I_{\mathbf{r}(\tilde{\mathbf{W}}^{(N)})}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) \right| \leq \frac{\sigma}{3}. \quad (36)$$

We also let M be large enough, so that (26) holds.

Note that $\lim_{N \rightarrow \infty} \bar{P}_e^{(N)}\{B_{S,\hat{\mathbf{r}}}^{(N)}\} = 0$ holds trivially in any of the following two situations. First, $B_{S,\hat{\mathbf{r}}}^{(N)}$ is an empty set for large N . Second, for large N and for every $\tilde{\mathbf{W}}^{(N)} \in B_{S,\hat{\mathbf{r}}}^{(N)}$, there exists a user subset S_0 with $S_0 \cap S = \emptyset$, such that $\left| -\frac{1}{N} \log_2 Pr\{Y^{(N)} | \mathbf{X}_{i \in S_0}^{(N)}\} - H_{\mathbf{r}(\tilde{\mathbf{W}}^{(N)})}(Y | \mathbf{X}_{i \in S_0}) \right| > \epsilon$. Therefore, in the rest of the proof, we assume N is large enough, $B_{S,\hat{\mathbf{r}}}^{(N)}$ is not empty. For all user subset S_0 with $S_0 \cap S = \emptyset$,

⁶Note that in Step 3, we already showed the probability for the receiver to output an erroneous message estimate is asymptotically zero. Therefore, in this Step, we only consider the possible situation that the receiver outputs the correct message.

⁷As in Step 3, if the asymptotic input distribution $\mathbf{P}_{\mathbf{X}|\mathbf{r}}$ is not continuous in $\mathbf{r}_{i \in S \setminus \{k\}}$ at $\hat{\mathbf{r}}$ for all $\hat{\mathbf{r}}$ satisfying $\hat{\mathbf{r}}_{i \notin S \setminus \{k\}} = \mathbf{r}_{i \notin S \setminus \{k\}}$, $\hat{\mathbf{r}}_{i \in S \setminus \{k\}} \leq \tilde{\mathbf{r}}_{i \in S \setminus \{k\}} < \hat{\mathbf{r}}_{i \in S \setminus \{k\}} + \frac{R_{\max}}{M} \mathbf{1}_{i \in S \setminus \{k\}}$, then (36) may not be satisfied only by setting M at a large value. In this case, one needs to further partition the set $B_{S,\hat{\mathbf{r}}}^{(N)}$ into a finite number of subsets, such that (36) is satisfied by messages within each subset. The rest of the proof can be applied to each subset of messages with only minor revisions. Hence the corresponding discussion is skipped.

we have

$$\left| -\frac{1}{N} \log_2 \Pr\{Y^{(N)} | \mathbf{X}_{i \in S_0}^{(N)}\} - H_{\hat{\mathbf{r}}}(Y | \mathbf{X}_{i \in S_0}) \right| \leq \epsilon, \quad (37)$$

which implies that

$$|H_{\hat{\mathbf{r}}}(Y | \mathbf{X}_{i \in S_0}) - H_{\tilde{\mathbf{r}}}(Y | \mathbf{X}_{i \in S_0})| \leq 2\epsilon. \quad (38)$$

Next, we present a key proposition to support the rest of the proof.

Proposition 2: There exists a user subset S_1 with $S_1 \cap S = \phi$, such that for all user subsets $S_2 \subseteq \overline{S \cup S_1}$, with $\overline{S \cup S_1}$ being the complement of $S \cup S_1$, we have

$$\sum_{i \in S_2} \hat{r}_i + \hat{r}_k > I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1}). \quad (39)$$

■

The proof of Proposition 2 is given in Appendix C.

Let S_1 be the user subset found in Proposition 2. Let $\tilde{\mathbf{W}}^{(N)} \in B_{S, \tilde{\mathbf{r}}}^{(N)}$ be a message whose codeword is denoted by $\tilde{\mathbf{X}}^{(N)}$. Define $\tilde{\mathbf{r}} = \mathbf{r}(\tilde{\mathbf{W}}^{(N)})$. Combining (39), (36), and (38), we know that, for all user subsets $S_2 \subseteq \overline{S \cup S_1}$, the following inequality holds

$$\sum_{i \in S_2} \tilde{r}_i + \tilde{r}_k > I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1}) - 2\epsilon \geq I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1}) - 2\epsilon - \frac{\sigma}{3}. \quad (40)$$

Choose $\epsilon < \frac{\sigma}{3}$. Since $\tilde{\mathbf{r}} \in \mathbf{R}_k^{(\sigma)}$, from (22)⁸, we know that there exists a user subset $\tilde{S} \subseteq S$, $k \in \tilde{S}$, and a user subset $S_2 \subseteq \overline{S \cup S_1}$, such that

$$\sum_{i \in S_2 \cup \tilde{S}} \tilde{r}_i < I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \tilde{S}}; Y | \mathbf{X}_{i \in S_1}) - \sigma. \quad (41)$$

Therefore, from (40) and (41), we obtain

$$\sum_{i \in \tilde{S} \setminus \{k\}} \tilde{r}_i < I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - \frac{2\sigma}{3} + 2\epsilon. \quad (42)$$

According to the definition of $B_{S, \tilde{\mathbf{r}}}^{(N)}$, for all $i \in S \setminus \{k\}$, we have $\tilde{W}_i^{(N)} \neq W_i^{(N)}$. Under this condition, $\tilde{\mathbf{X}}_{i \in \tilde{S} \setminus \{k\}}^{(N)}$ and $Y^{(N)}$ are generated independently. Consequently, the probability that $(\tilde{\mathbf{X}}_{i \in \tilde{S} \setminus \{k\}}^{(N)}, Y^{(N)}) \in A_{\epsilon}^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \mathbf{r}(\tilde{\mathbf{X}}^{(N)})} \right)$ can be upper bounded as follows

$$\begin{aligned} & \log_2 \left[\Pr \left\{ (\tilde{\mathbf{X}}_{i \in \tilde{S} \setminus \{k\}}^{(N)}, Y^{(N)}) \in A_{\epsilon}^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \tilde{\mathbf{r}}} \right) \right\} \right] \\ & \leq N \left[(H_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) + \epsilon) - (H_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}} | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - \epsilon) - (H_{\tilde{\mathbf{r}}}(Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - \epsilon) \right] \\ & = -N \left[I_{\tilde{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - 3\epsilon \right]. \end{aligned} \quad (43)$$

⁸Here we regard $\bar{S}_1$, which is the compliment of S_1 , as the user subset S in (22).

Combining (43) with (36), we get

$$\log_2 \left[Pr \left\{ (\tilde{\mathbf{X}}_{i \in \tilde{S} \setminus \{k\}}^{(N)}, Y^{(N)}) \in A_\epsilon^{(N)} \left(\mathbf{P}_{(\mathbf{X}, Y) | \hat{\mathbf{r}}} \right) \right\} \right] \leq -N \left[I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - \frac{\sigma}{3} - 3\epsilon \right]. \quad (44)$$

Consequently,

$$\bar{P}_c^{(N)} \{B_{S, \hat{\mathbf{r}}}^{(N)}\} \leq \sum_{\substack{\tilde{\mathbf{W}}_{i \in \tilde{S} \setminus \{k\}}^{(N)} \\ \tilde{\mathbf{W}}^{(N)} \in B_{S, \hat{\mathbf{r}}}^{(N)}}} 2^{-N \left[I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) - \frac{\sigma}{3} - 3\epsilon \right]}. \quad (45)$$

Assume N is large enough, so that

$$\sum_{\substack{\tilde{\mathbf{W}}_{i \in \tilde{S} \setminus \{k\}}^{(N)} \\ \tilde{\mathbf{W}}^{(N)} \in B_{S, \hat{\mathbf{r}}}^{(N)}}} 1 < 2^{N \sum_{i \in \tilde{S} \setminus \{k\}} (\hat{r}_i + \frac{R_{\max}}{M})} \leq 2^{N \left(\sum_{i \in \tilde{S} \setminus \{k\}} \hat{r}_i + \frac{K R_{\max}}{M} \right)}. \quad (46)$$

Therefore (45), (46) and (26) yield

$$\log_2 \left(\bar{P}_c^{(N)} \{B_{S, \hat{\mathbf{r}}}^{(N)}\} \right) < N \left[\sum_{i \in \tilde{S} \setminus \{k\}} \hat{r}_i - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) + \frac{\sigma}{2} + 3\epsilon \right]. \quad (47)$$

Because $\sum_{i \in \tilde{S} \setminus \{k\}} \hat{r}_i - I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in \tilde{S} \setminus \{k\}}; Y | \mathbf{X}_{i \notin \tilde{S} \setminus \{k\}}) + \sigma < 0$, choose $\epsilon < \frac{\sigma}{6}$, we get

$$\lim_{N \rightarrow \infty} \bar{P}_c^{(N)} \{B_{S, \hat{\mathbf{r}}}^{(N)}\} = 0. \quad (48)$$

Note that, given σ , (48) holds for all $\hat{\mathbf{r}}$, S , and $\hat{\mathbf{r}}$ satisfying the assumptions. Therefore, by taking $M \rightarrow \infty$, we can see, if $\hat{\mathbf{r}} \notin \mathbf{R}_{kc}$, then the probability that the receiver finds a message $\tilde{\mathbf{W}}^{(N)}$ in $\mathbf{R}_k^{(\sigma)}$ with codeword $\tilde{\mathbf{X}}^{(N)}$ being jointly typical with $Y^{(N)}$ and $\tilde{W}_k^{(N)} = W_k^{(N)}$ is asymptotically zero. Next, by taking $\sigma \rightarrow 0$, we conclude that, for all message sequences $\{\mathbf{W}^{(N)}\}$ with $\mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_{kc}$, $\forall N$, and $\lim_{N \rightarrow \infty} \mathbf{r}(\mathbf{W}^{(N)}) \notin \mathbf{R}_{kc}$, we have $\lim_{N \rightarrow \infty} P_{kc}(\mathbf{W}^{(N)}) = 1$.

We have now proved that $\mathbf{R}_k$ is asymptotically achievable for user k . ■

C. Proof of Proposition 2

Proof: If the claim of the proposition is not true, then for all user subsets S_1 with $S_1 \cap S = \emptyset$, there exists a user subset $S_2 \subseteq \overline{S \cup S_1}$ that satisfies

$$\sum_{i \in S_2} \hat{r}_i + \hat{r}_k \leq I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1}). \quad (49)$$

Consequently, given the mutually exclusive user subsets S , S_1 and S_2 with $k \in S$, for all user subsets S_3 with $k \notin S_3$ and $S_3 \cap S_1 = S_3 \cap S_2 = \phi$, we have

$$\begin{aligned}
\sum_{i \in S_2} \hat{r}_i + \hat{r}_k &\leq I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1}) \\
&= H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}) - H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}} | \mathbf{X}_{i \in S_1}, Y) \\
&\leq H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}) - H_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}} | \mathbf{X}_{i \in S_1 \cup S_3}, Y) \\
&= I_{\hat{\mathbf{r}}}(\mathbf{X}_{i \in S_2 \cup \{k\}}; Y | \mathbf{X}_{i \in S_1 \cup S_3}).
\end{aligned} \tag{50}$$

From the derivation, we can see that $S_1 \cup S_3$ can be constructed to be any user subset satisfying $S_1 \cup S_3 \subseteq \{1, \dots, K\} \setminus \{k\}$. Consequently, (50) implies $\hat{\mathbf{r}} \in \mathbf{R}_{kc}$, where $\mathbf{R}_{kc}$ is the closure of $\mathbf{R}_k$ defined in (10). This contradicts the assumption that $\hat{\mathbf{r}} \notin \mathbf{R}_{kc}$. Therefore, conclusion of the proposition must hold. $\blacksquare$

D. Proof of Theorem 4

Proof: Assume we are given a set of rate regions $\{\mathbf{R}_k, k \in S_0\}$, where $\mathbf{R}_k$ is asymptotically achievable for user k . We will show next that if $\mathbf{R}_k$ are defined by (10) for $k \in S_0$, then $\mathbf{R}_{S_0}$ defined by (11) is given by $\mathbf{R}_{S_0} = \bigcap_{k \in S_0} \mathbf{R}_k$. Since it is easy to see that $\mathbf{R}_{S_0} \subseteq \bigcap_{k \in S_0} \mathbf{R}_k$, we only need to show $\mathbf{R}_{S_0} \supseteq \bigcap_{k \in S_0} \mathbf{R}_k$, i.e., $\mathbf{r} \in \mathbf{R}_k$ for all $k \in S_0$ implies $\mathbf{r} \in \mathbf{R}_{S_0}$.

Assume $\mathbf{r} \in \mathbf{R}_k$ for all $k \in S_0$. Given a user subset $S \cap S_0 \neq \phi$, we can find a user subset $\tilde{S}_1 \subseteq S$ and $\tilde{S}_1 \cap S_0 \neq \phi$, such that

$$\sum_{i \in \tilde{S}_1} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}_1}; Y | \mathbf{X}_{i \notin S}). \tag{51}$$

For the same reason, if $S \setminus \tilde{S}_1 \cap S_0 \neq \phi$, we can find a user subset $\tilde{S}_2 \subseteq S \setminus \tilde{S}_1$, such that

$$\sum_{i \in \tilde{S}_2} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}_2}; Y | \mathbf{X}_{i \notin S \setminus \tilde{S}_1}). \tag{52}$$

In general, if $S \setminus \tilde{S}_1 \setminus \dots \setminus \tilde{S}_{j-1} \cap S_0 \neq \phi$, we can find $\tilde{S}_j \subseteq S \setminus \tilde{S}_1 \setminus \dots \setminus \tilde{S}_{j-1}$, such that

$$\sum_{i \in \tilde{S}_j} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}_j}; Y | \mathbf{X}_{i \notin S \setminus \tilde{S}_1 \setminus \dots \setminus \tilde{S}_{j-1}}). \tag{53}$$

This procedure can be carried out recursively until for some integer $j > 0$, $S \setminus \tilde{S}_1 \setminus \dots \setminus \tilde{S}_j \cap S_0 = \phi$.

Consequently, define $\tilde{S} = \bigcup_{k=1}^j \tilde{S}_k$. Due to (53), we have

$$\sum_{i \in \tilde{S}} r_i < \sum_{k=1}^j I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}_k}; Y | \mathbf{X}_{i \notin S \setminus \tilde{S}_1 \setminus \dots \setminus \tilde{S}_{k-1}}) = I_{\mathbf{r}}(\mathbf{X}_{i \in \tilde{S}}; Y | \mathbf{X}_{i \notin S}). \tag{54}$$

Because $\tilde{S} \supseteq S \cap S_0$ can be found for any $S \subseteq \{1, \dots, K\}$, $S \cap S_0 \neq \phi$, we conclude that $\mathbf{r} \in \mathbf{R}_{S_0}$. $\blacksquare$

E. Proof of Proposition 1

Proof: Let $\mathbf{R}_{\max}$ be the maximum achievable rate region given by Theorem 1. It is easy to show that any rate region $\tilde{\mathbf{R}}$ with $\tilde{\mathbf{R}} \subseteq \mathbf{R}_{\max}$ is also asymptotically achievable. Therefore, we only need to show that, for all rate vector $\mathbf{r}$ with $\sum_{i=1}^K \sqrt{r_i/n} < 1$, the following inequality holds for all user subset $S \subseteq \{1, \dots, K\}$.

$$\sum_{i \in S} r_i < I_{\mathbf{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}). \quad (55)$$

Note that since the channel output symbol Y is a deterministic function of the channel input symbol vector $\mathbf{X}$, we have $H_{\mathbf{r}}(Y | \mathbf{X}) = 0$. Consequently,

$$\begin{aligned} I_{\mathbf{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) &= H_{\mathbf{r}}(Y | \mathbf{X}_{i \notin S}) \\ &\geq H_{\mathbf{r}}(Y | \mathbf{X}_{i \notin S} = \mathbf{0}) \Pr\{\mathbf{X}_{i \notin S} = \mathbf{0}\} \\ &= H_{\mathbf{r}}(Y | \mathbf{X}_{i \notin S} = \mathbf{0}) \prod_{i \notin S} (1 - \sqrt{r_i/n}). \end{aligned} \quad (56)$$

Since

$$\begin{aligned} H_{\mathbf{r}}(Y | \mathbf{X}_{i \notin S} = \mathbf{0}) &\geq - \sum_{i=1}^{2^n} \Pr\{Y = i\} \log_2 \Pr\{Y = i\} \\ &\geq n \Pr\{Y \notin \{0, c\}\} \\ &\geq n \sum_{i \in S} \Pr\{X_i \neq 0, \mathbf{X}_{k \in S \setminus \{i\}} = \mathbf{0}\} \\ &= n \sum_{i \in S} \sqrt{r_i/n} \prod_{k \notin S \setminus \{i\}} (1 - \sqrt{r_k/n}), \end{aligned} \quad (57)$$

we indeed have

$$\begin{aligned} I_{\mathbf{r}}(\mathbf{X}_{i \in S}; Y | \mathbf{X}_{i \notin S}) &\geq n \sum_{i \in S} \sqrt{r_i/n} \prod_{k \neq i} (1 - \sqrt{r_k/n}) \\ &\geq n \sum_{i \in S} \sqrt{r_i/n} (1 - \sum_{k \neq i} \sqrt{r_k/n}) > \sum_{i \in S} r_i, \end{aligned} \quad (58)$$

where the last inequality follows from $\sum_{i=1}^K \sqrt{r_i/n} < 1$. ■

REFERENCES

- [1] C. Shannon, *A Mathematical Theory of Communication*, Bell System Technical Journal, Vol. 27, pp. 379-423, 623-656, July, October, 1948.
- [2] T. Cover and J. Thomas, *Elements of Information Theory*, 2nd Edition, Wiley Interscience, 2005.
- [3] R. Gallager, *A Simple Derivation of The Coding Theorem and Some Applications*, IEEE Transactions on Information Theory, Vol. 11, pp. 3-18, January 1965.
- [4] I. Telatar and R. Gallager, *Combining Queueing Theory with Information Theory for Multiaccess*, IEEE Journal on Selected Areas in Communications, Vol. 13, pp. 963-969, August 1995.
- [5] R. Berry and R. Gallager, *Communication over Fading Channels with Delay Constraints*, IEEE Transactions on Information Theory, Vol. 48, pp. 1135-1149, May 2002.

- [6] E. Yeh, *Delay-optimal Rate Allocation in Multiaccess Communications: A Cross-layer View*, IEEE MMSP, St.Thomas, Virgin Islands, December 2002.
- [7] Q. Zhao and B. Sadler, *A Survey of Dynamic Spectrum Access*, IEEE Signal Processing Magazine, Vol. 24, pp. 79-89, May 2007.
- [8] A. Ephremides and B. Hajek, *Information Theory and Communication Networks: An Unconsummated Union*, IEEE Transactions on Information Theory, Vol. 44, pp.2416-2434, October 1998.
- [9] D. Bertsekas and R. Gallager, *Data Network*, 2nd Edition, Prentice Hall, 1992.
- [10] J. Luo and A. Ephremides, *On the Throughput, Capacity, and Stability Regions of Random Multiple Access*, IEEE Transactions on Information Theory, Vol. 52, pp. 2593-2607, June 2006.
- [11] S. Shamaï, I. Teletar, and S. Verdú, *Fountain Capacity*, IEEE Transactions on Information Theory, Vol. 53, pp. 4372-4376, November 2007.
- [12] Y. Polyanskiy, V. Poor, and S. Verdú, *Channel Coding Rate in The Finite Blocklength Regime*, submitted to IEEE Transactions on Information Theory.
- [13] G. Forney, *Exponential Error Bounds for Erasure, List, and Decision Feedback Schemes*, IEEE Transactions on Information Theory, Vol.14, pp. 206-220, March 1968.
- [14] R. Rao and A. Ephremides, *On The Stability of Interacting Queues in A Multiple-access System*, IEEE Transactions on Information Theory, Vol. 34, pp. 918-930, September 1988.
- [15] J. Hui, *Multiple Accessing for The Collision Channel without Feedback*, IEEE Journal on Selected Areas in Communications, Vol. SAC-2, pp. 575-582, July 1984.
- [16] Z. Wang and J. Luo, *Achievable Error Exponent of Channel Coding in Random Access Communication*, IEEE ISIT, Austin, TX, June 2010.
- [17] R. Fano, *Transmission of Information*, The M.I.T Press, and John Wiley & Sons, Inc., New York, N.Y., 1961.